

CATALOG

CCTV
NVR
DVR
Analog
Switch
4G Router

PRODUCT

IPC 1 Series

i-BECHAMP®

2 MP Fixed Bullet Network Camera

DS-2CD1021G0-I

Case Type : Bullet
Illumination Level : Normal
Lens Type : 2.8 mm, 4 mm
Protection Level : IP67
Resolution : 2MP



4 MP Smart Hybrid Light Fixed Bullet Network Camera

DS-2CD1043G2-LIU(F)

Case Type : Bullet
Illumination Level : Normal
Lens Type : 2.8 mm, 4 mm
Protection Level : IP67
Resolution : 4 MP



2 MP Smart Hybrid Light Fixed Bullet Network Camera

DS-2CD1023G2-LIU(F)

Case Type : Bullet
Illumination Level : Normal
Lens Type : 2.8 mm, 4 mm
Protection Level : IP67
Resolution : 2MP



4 MP ColorVu with Smart Hybrid Light Fixed Network Camera

DS-2CD1047G2H-LIU(F)

Case Type : Bullet
Illumination Level : Normal
Lens Type : 2.8 mm, 4 mm
Protection Level : IP67
Resolution : 4 MP

ColorVu



2 MP ColorVu with Smart Hybrid Light Fixed Network Camera

DS-2CD1027G2H-LIU(F)

Case Type : Bullet
Illumination Level : Normal
Lens Type : 2.8 mm, 4 mm
Protection Level : IP67
Resolution : 2MP

ColorVu



2 MP Smart Hybrid Light Fixed Dome Network Camera

DS-2CD1123G2-LIU(F)

Case Type : Dome
Illumination Level : Normal
Lens Type : 2.8 ,4 mm
Protection Level : IP67
Resolution : 2MP



4 MP ColorVu with Smart Hybrid Light Fixed Network Camera

DS-2CD1147G2H-LIU(F)

Case Type : Dome
Illumination Level : Normal
Lens Type : 2.8 ,4 mm
Protection Level : IP67
Resolution : 4 MP

ColorVu



2 MP ColorVu with Smart Hybrid Light Dome Network Camera

DS-2CD1127G2H-LIU(F)

Case Type : Dome
Illumination Level : Normal
Lens Type : 2.8 ,4 mm
Protection Level : IP67
Resolution : 2MP

ColorVu



4 MP Smart Hybrid Light Fixed Dome Network Camera

DS-2CD1143G2-LIU(F)

Case Type : Dome
Illumination Level : Normal
Lens Type : 2.8
Protection Level : IP67
Resolution : 4 MP



ColorVu 3.0
AcuSense 3.0
Audio 2.0
Motorization 2.0
EasyIP 4.0

PRODUCT

IPC 1 Series

i-BECHAMP®

4 MP ColorVu with Smart Hybrid Light Fixed Turret Network Camera DS-2CD1347G2H-LIU(F)

ColorVu



Case Type : Turret
Illumination Level : Normal
Lens Type : 2.8 mm, 4 mm
Protection Level : IP67
Resolution : 4 MP



4 MP Smart Hybrid Light Fixed Turret Network Camera DS-2CD1343G2-LIU(F)



Case Type : Turret
Illumination Level : Normal
Lens Type : 2.8 mm, 4 mm
Protection Level : IP67
Resolution : 4 MP



2 MP ColorVu MD 2.0 Fixed Turret Network Camera DS-2CD1327G2-L(UF)

ColorVu



Case Type : Turret
Illumination Level : Normal
Lens Type : 2.8 mm, 4 mm
Protection Level : IP67
Resolution : 2 MP



2 MP Smart Hybrid Light Fixed Turret Network Camera DS-2CD1323G2-LIU(F)



Case Type : Turret
Illumination Level : Normal
Lens Type : 2.8 mm, 4 mm
Protection Level : IP67
Resolution : 4 MP



HIKVISION

HIKVISIONSM ICT Models

Deeper Intelligence, Better Security



PRODUCT

NVR



NEW

4-ch 1U K Series AcuSense 4K NVR DS-7604NXI-K1

Up to 4-ch IP camera inputs
H.265+/H.265/H.264+/H.264
video formats
Up to 40 Mbps incoming bandwidth



4-ch PoE 1U K Series AcuSense 4K NVR DS-7604NXI-K1/4P

Up to 4-ch IP camera inputs,
plug & play with 4
power-over-Ethernet (PoE) interfaces
H.265+/H.265/H.264+/H.264 video formats



8-ch 1U K Series AcuSense 4K NVR DS-7608NXI-K2

Up to 8-ch IP camera inputs
H.265+/H.265/H.264+/H.264
video formats
Up to 80 Mbps incoming bandwidth



8-ch 1U K Series AcuSense 4K NVR DS-7608NXI-K2(D)

Up to 8-ch IP camera inputs
H.265+/H.265/H.264+/H.264
video formats
Up to 80 Mbps incoming bandwidth



8-ch PoE 1U K Series AcuSense 4K NVR DS-7608NXI-K1/8P

Up to 8-ch IP camera inputs,
plug & play with 8
power-over-Ethernet (PoE) interfaces
H.265+/H.265/H.264+/H.264 video formats
Up to 80 Mbps incoming bandwidth



16-ch 1U K Series AcuSense 4K NVR DS-7616NXI-K2(D)

Up to 16-ch IP camera inputs
H.265+/H.265/H.264+/H.264
video formats
Up to 160 Mbps incoming bandwidth



16-ch PoE 1U K Series AcuSense 4K NVR DS-7616NXI-K2/16P(D)

Up to 16-ch IP camera inputs,
plug & play with 16
Power-over-Ethernet (PoE) interfaces
H.265+/H.265/H.264+/H.264
video formats Up to 160 Mbps incoming bandwidth



HIKVISION

A Pioneer in Security and Beyond

Supporting Smart Decision Making and Delivering Commercial Growth

PRODUCT

Analog

2MP Smart Hybrid Light Audio Fixed Mini Bullet Camera DS-2CE16D0T-LFS

Case Type : Bullet
Illumination Level : Normal
Lens Type : 2.8 mm, 3.6 mm
Protection Level : IP67
Resolution : 2MP



3K Smart Hybrid Light Audio Fixed Mini Bullet Camera DS-2CE16K0T-LFS

Case Type : Bullet
Illumination Level : Normal
Lens Type : 2.8 mm, 3.6 mm
Protection Level : IP67
Resolution : 3K



2MP Smart Hybrid Light Audio Indoor Fixed Turret Camera DS-2CE76D0T-LMFS

Case Type : Turret
Illumination Level : Normal
Lens Type : 2.8 mm, 3.6 mm
Protection Level : IP67
Resolution : 2MP



2MP Smart Hybrid Light Fixed Turret Camera DS-2CE76D0T-EXLMF

Case Type : Turret
Illumination Level : Normal
Lens Type : 2.8 mm, 3.6 mm
Protection Level : IP67
Resolution : 2MP



DVR

4-ch 1080p 1U H.265 AcuSense DVR iDS-7204HQHI-M1/S

4 channels and 1 HDD
1U AcuSense DVR
Efficient H.265 pro+ compression
technology video formats
Up to 6 network cameras can be connected.



4-ch 1080p 1U H.265 AcuSense DVR iDS-7204HQHI-M1/XT

4 channels and 1 HDD
1U AcuSense DVR
Efficient H.265 pro+ compression technology
Support All channels HDTVI Two-Way Audio Technology
Support All channels Motion Detection Technology




8-ch 1080p 1U H.265 AcuSense DVR iDS-7208HQHI-M1/XT

8 channels and 1 HDD
1U AcuSense DVR
Efficient H.265 pro+ compression technology
Encoding ability up to 3K/5M Lite @ 12 fps
5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)



8-ch 1080p 1U H.265 AcuSense DVR iDS-7208HQHI-M1/XT

8 channels and 1 HDD
1U AcuSense DVR
Efficient H.265 pro+ compression technology
Encoding ability up to 3K/5M Lite @ 12 fps
5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)

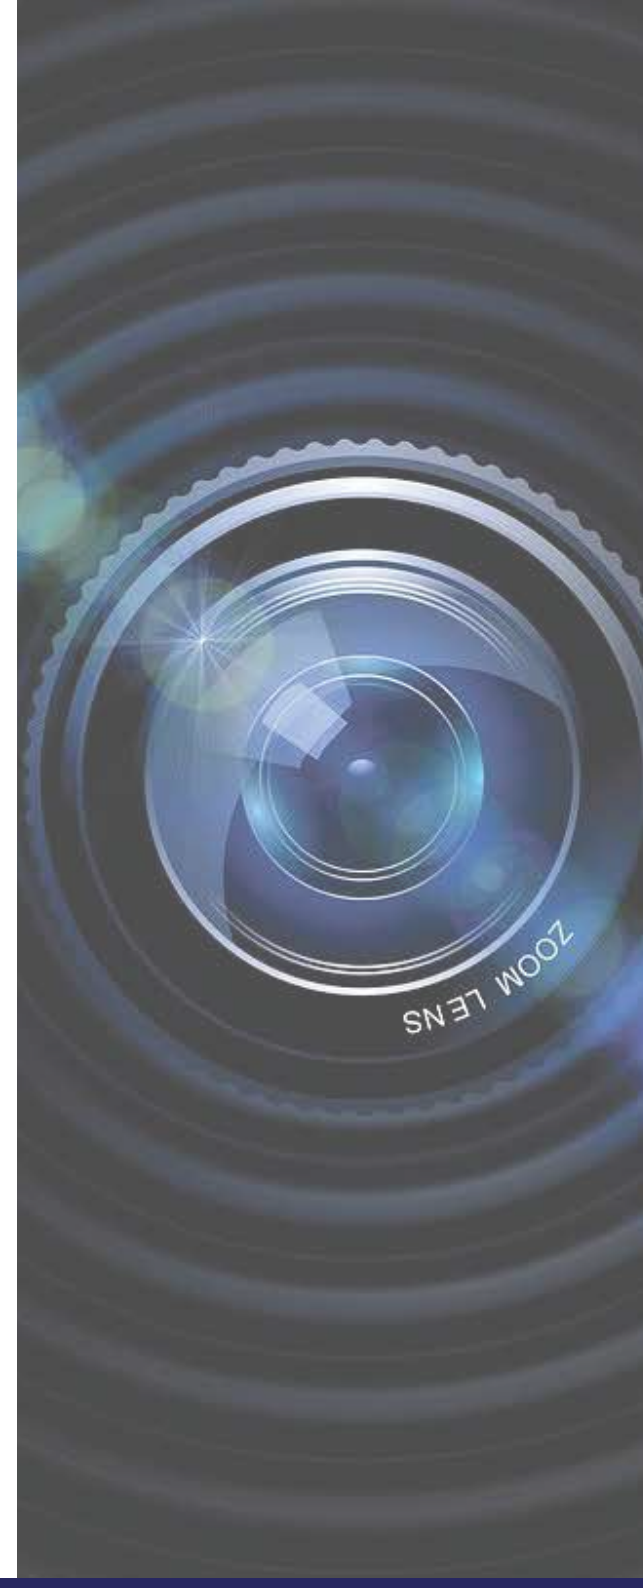

PRODUCT

Switch



8 Port Fast Ethernet Smart POE Switch DS-3E1310P-EI/M

8 × 10/100 Mbps PoE ports,
2 × Gigabit RJ45 port
Total PoE Power Budget 60 W
Support 802.1Q VLAN
Up to 300 m Long Range PoE Transmission
Support STP/RSTP Loop prevention



4 Port Fast Ethernet Smart POE Switch DS-3E1106P-EI/M

4 × 10/100 Mbps PoE port,
2 × 10/100 Mbps RJ45 port
Total PoE Power Budget 45W
Support 802.1Q VLAN
Up to 300 m Long Range PoE Transmission
Support STP/RSTP Loop prevention




16-Port Gigabit Switch with 8 POE+ DS-3E0516P-O

8 × 1 Gigabit PoE port, 8
× 1 Gigabit RJ45 port
Gigabit PoE and non-PoE
ports for multiple use
Built to last with a rugged metal case
Plug-and-play with easy connection




16 Port Fast Ethernet Smart POE Switch DS-3E1318P-EI

16 × 10/100 Mbps PoE ports,
2 × Gigabit combos.
Total PoE Power Budget 230 W
Support 802.1Q VLAN
Up to 300 m Long Range PoE Transmission
Support STP/RSTP Loop prevention



24 Port Fast Ethernet Smart POE Switch DS-3E1326P-EI

24 × 10/100M PoE ports,
2 × Gigabit combos. 2 ×
Gigabit combos.
Total PoE Power Budget 370 W
Support 802.1Q VLAN 6 kV Surge Protection
Up to 300 m Long Range PoE Transmission



8-Port Gigabit Switch with 4 POE+ DS-3E0508P-O

4 × Gigabit PoE port,
4 × Gigabit RJ45 port
Gigabit PoE and non-PoE
ports for multiple use
Built to last with a rugged metal case
Plug-and-play with easy connection



4G Router

AC1200 4G CAT4 Wireless Router DS-3WR4G12C

AC1200 Dual-band Wi-Fi
4G Boost Faster Speedports
for multiple use
Instantly Access a Mobile
Network With a SIM Card



HIKVISION®